

General Technical Data

Dimensions	17.30" W x 1.75" H x 9.14" D
Breaker Capacity	2 Modules (24 breakers)
Chassis Ground	Two Single M6 Studs
Rack Mounting	19" or 23"
RoHS Status	Compliant

X1180R Breaker Module

Input Feed	1 x 120A
Current Carrying Capacity	12 x 10A
Operating Voltage	Up to 72VDC
Breaker Capacity	12 Positions
Input Terminals	2xM6 Studs, 5/8" Offset
Output Terminals	Screw Terminal Blocks
Approvals	UL 60950-1 CAN/CSA - C22.2 No. 60950 CB Scheme


Standard Part Numbers

PDU Series	Part Number	Breaker Module*	Supply Feeds	Breakers per Feed	Figure Number	Rack Mount Size	Operating Voltage	Current Carrying Capacity
X1180R	X1180R-S00-0542-1-240X00-19-048	X1180R-X1180R	1	24	1	19"	Up to 72VDC	120
	23"							
	X1180R-S00-0542-2-120X120-19-048		2	12+12	2	19"		240
	23"							

*Breakers sold separately

X1180R Dimensional Drawing

* Dimensions for reference only

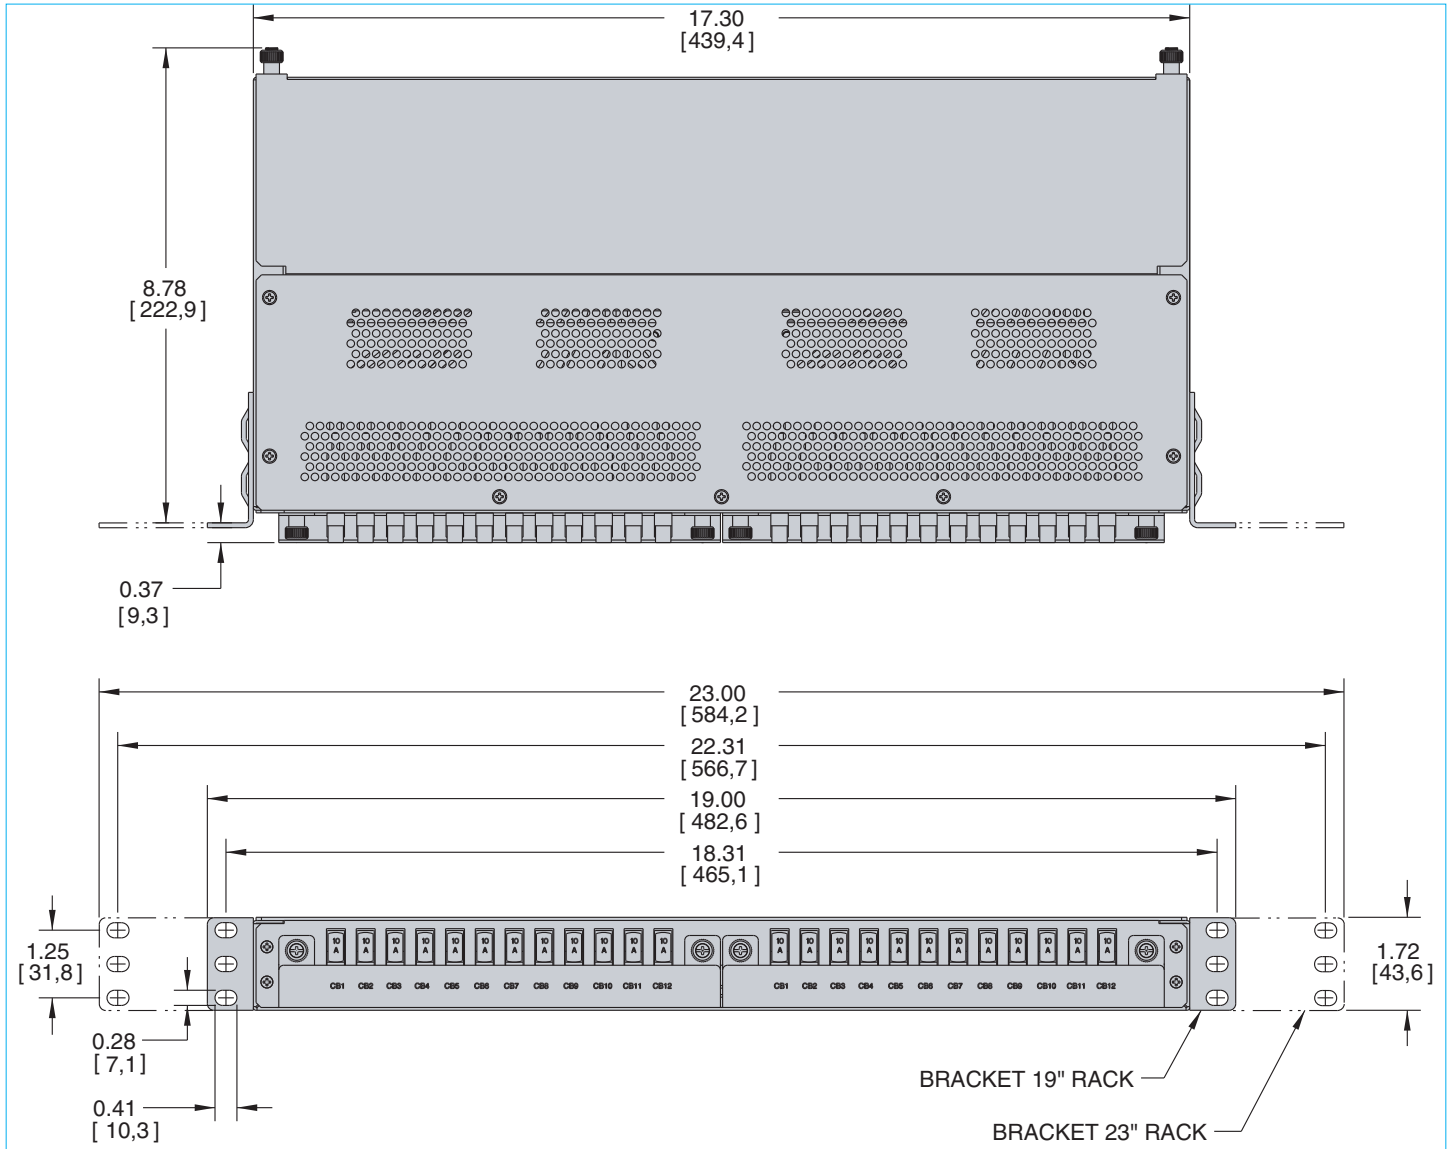

Schematics

—— PWR
 - - - - RTN

Fig. 1: X1180R... 00X240

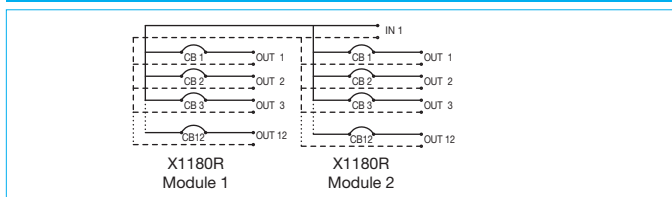


Fig. 2: X1180R... 120X120

