

General Technical Data

Dimensions	17.30" W x 1.75" H x 9.14" D
Breaker Capacity	2 Modules (16 breakers)
Chassis Ground	Two Single M6 Studs
Rack Mounting	19" or 23"
RoHS Status	Compliant

X482R Breaker Module

Input Feed	1 or 2 x 240A
Current Carrying Capacity	8 x 50A
Operating Voltage	Up to 72VDC
Breaker Capacity	8 Positions
Input Terminals	2xM6 Studs, 5/8" Offset
Output Terminals	M5 Stud Terminals
Approvals	UL 60950-1 CAN/CSA - C22.2 No. 60950 CB Scheme


Standard Part Numbers

PDU Series	Part Number	Breaker Module*	Supply Feeds	Breakers per Feed	Figure Number	Rack Mount Size	Operating Voltage	Current Carrying Capacity
X482R	X482R-S00-0500-1-160X00-19-048	X482R-X482R	1	16	1	19"	Up to 72VDC	240
	X482R-S00-0500-1-160X00-23-048					23"		
	X482R-S00-0500-2-80X80-19-048		2	8+8	2	19"		400
	X482R-S00-0500-2-80X80-23-048					23"		
	X482R-S00-0500-3-80X44-19-048		3	8+4+4	3	19"		640
	X482R-S00-0500-3-80X44-23-048					23"		
	X482R-S00-0500-4-44X44-19-048		4	4+4+4+4	4	19"		800
	X482R-S00-0500-4-44X44-23-048					23"		

*Breakers sold separately

X482R Dimensional Drawing

* Dimensions for reference only

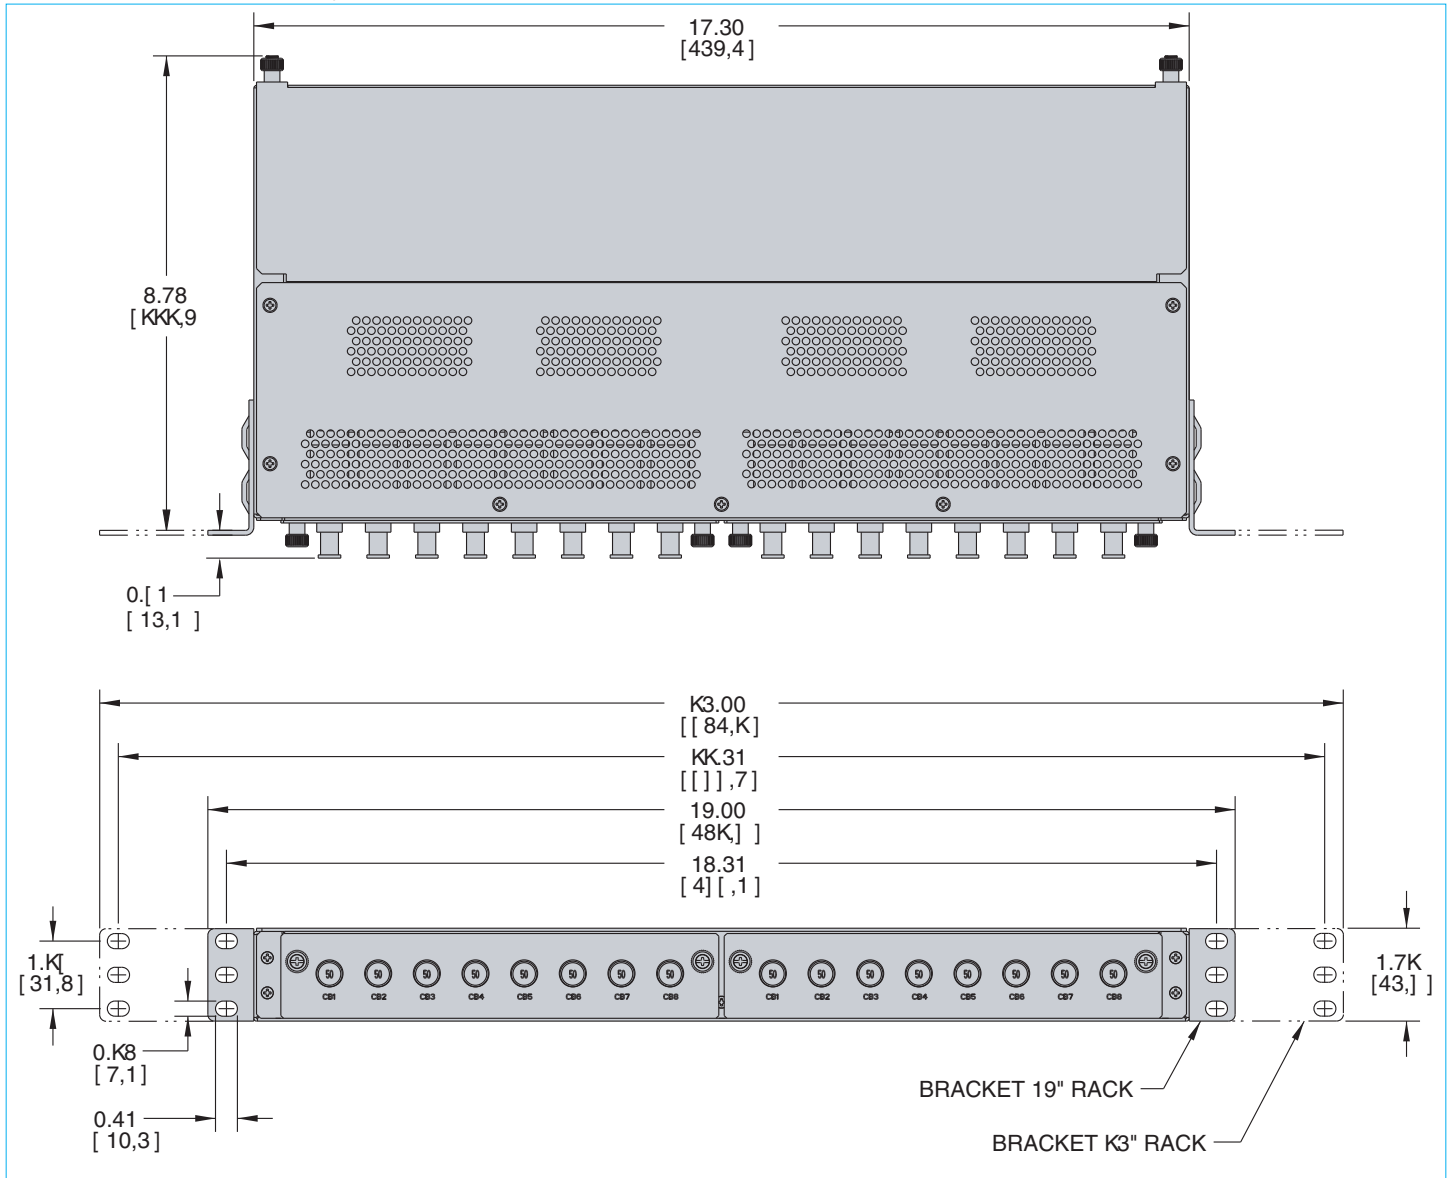

Schematics

—— PWR
 - - - - RTN

Fig. 1: X482R... 160X00

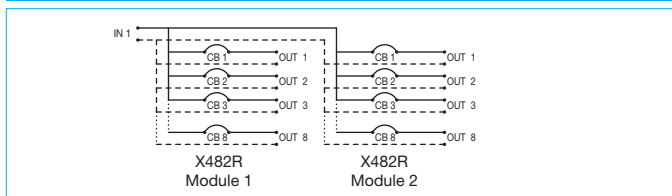


Fig. 2: X482... 80X80

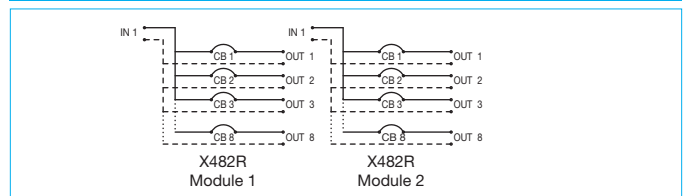


Fig. 3: X482... 80X44

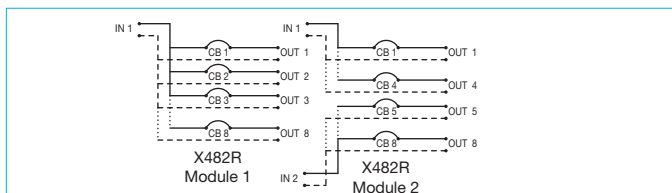


Fig. 4: X482R... 44X44

