

Description

One, two and three pole thermal-magnetic circuit breakers with trip-free mechanism and toggle actuation (S-type TM CBE to EN 60934/IEC 934). Featuring a combi-foot design for both symmetric and asymmetric rail mounting. Available with auxiliary contact (1 x N/O or 1 x N/C) for status signalling. Two and three pole models are internally linked to ensure that both/all poles trip in the event of an overload on one pole, even if the actuator is held in the ON position. This CBE can be supplied in current ratings up to 32 A with a choice of characteristic curves. All screw terminals are recessed for safety. Approved to CBE standard EN 60934 (IEC 60934).

Typical applications

Process control equipment, robotics, machine tool control, communications systems, instrumentation.

Ordering information

Type No.

2210 single and multipole thermal-magnetic circuit breaker

Mounting

T rail mounting

Actuator design

2 toggle

Number of poles

- 1** single pole protected
- 2** 2-pole protected
- 3** 3-pole protected
- 5** 2-pole, protected on one pole only

Accessories

0 without accessories

Terminal design (main contacts)

K0 screw terminals

Characteristic curve

- F1** fast acting: therm. 1.01-1.4xI_N; magn. 2-4xI_N DC (DC only)
- F2** fast acting: therm. 1.01-1.4xI_N; magn. 3,5-6,5xI_N AC/4,5-8,5xI_N DC
- M1** standard delay: therm. 1.01-1.4xI_N; magn. 6-12xI_N AC, 7,8-15,6xI_N DC
- T1** delayed: therm. 1.01-1.4xI_N; magn. 10-20xI_N AC
- T2** thermal only, 1.01-1.4xI_N
- M3** standard delay, low resistance: therm. 1.4-1.8xI_N; magn. 6-12xI_N AC, 7,8-15,6xI_N DC

Auxiliary contact design

H without intermediate position

Auxiliary contacts

- 0** without auxiliary contacts
- 1** with auxiliary contacts
- 2** auxiliary contacts on pole 1 only (multipole devices)
- 3** auxiliary contacts on pole 1 and 3 (3-pole devices)

Auxiliary contact function (see diagrams)

- 2** 1 N/O contact
- 3** 1 N/C contact

Auxiliary contact - terminal design

1 screw terminals


Current ratings

0.1...32 A

2210 - T 2 1 0 - K0 M1 - H 1 2 1 - 10 A ordering example

Approvals

Authority	Voltage ratings	Current ratings
GL, VDE (EN 60934)	3 AC 433 V; AC 250 V; DC 65 V	0.1...32 A
UL, CSA	AC 277 V; AC 277/480 V; DC 65 V	0.1...32 A

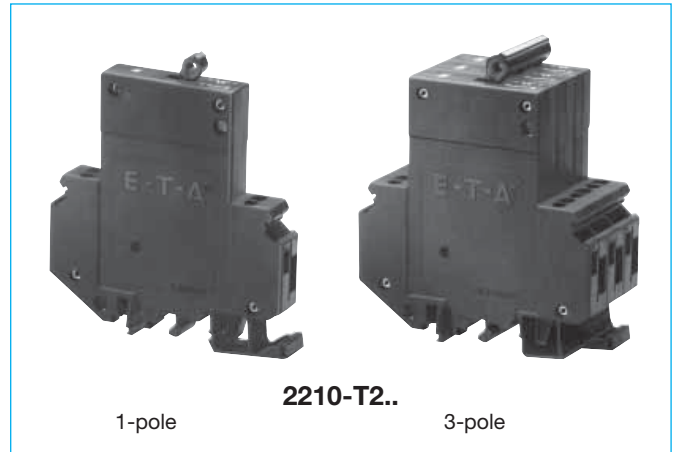

Technical data


For further details please see chapter: Technical Information

Voltage rating	AC 250 V; 3 AC 433 V (50/60 Hz); DC 65 V (UL: AC 277/480 V; DC 65 V)	
Current rating range	0.1...32 A for curves M1, T1, T2 0.1...16 A for curves F1, F2, M3	
Auxiliary circuit	1 A, AC 240 V / DC 65 V, resistive	
Typical life	3 AC 433 V; AC 250 V: 0.1...25 A 10,000 operations at 1 x I _N , inductive DC 65 V: 0.1...32 A 10,000 operations at 1 x I _N , inductive 3 AC 433 V; AC 250 V: 32 A 10,000 operations at 1 x I _N , resistive	
Ambient temperature	-30...+60 °C (-22...+140 °F) T 60	
Insulation co-ordination (IEC 60664 and 60664 A)	rated impulse withstand voltage 2.5 kV	pollution degree 2 reinforced insulation in operating area
Dielectric strength (IEC 60664 and 60664A)	test voltage operating area main/aux. circuit pole/pole	AC 3,000 V AC 3,000 V AC 1,500 V
Insulation resistance	> 100 MΩ (DC 500 V)	
Interrupting capacity I _{cn}	0.1...5 A 400 A 6...32 A 800 A curves F1, F2, M1, T1: 0.1...16 A 2,500 A (at DC 32 V) curve T2: 0.1...32 A 15 x I _N curve M3: 0.1...2 A AC 200A / DC 400A	
Interrupting capacity (UL 1077)	I _N	0.1...16 A 20...25 A
	AC 277 V 1-pole	5 000 A 2 000 A
	AC 277/480 V 2-/3-pole	5 000 A 2 000 A
	DC 65 V	2 000 A 2 000 A
Degree of protection (IEC 60529/DIN 40050)	operating area IP30 terminal area IP20	
Vibration	curve F1: 3 g (57-500 Hz), ± 0.23 mm (10-57 Hz) curves M1, M3, T1, T2: 5 g (57-500 Hz), ± 0.38 mm (10-57 Hz) to IEC 60068-2-6, test Fc 10 frequency cycles/axis	
Shock	curve F1: 25 g (11 ms), directions 1, 2, 3, 4, 5 10 g (11 ms), direction 6 curves M1, M3, T1, T2: 25 g (11 ms), directions 1, 2, 3, 4, 5 20 g (11 ms), direction 6 to IEC 60068-2-27, test Ea	
Corrosion	96 hours at 5 % salt mist to IEC 60068-2-11, test Ka	
Humidity	240 hours at 95 % RH to IEC 60068-2-78, test Cab	
Mass	approx. 60 g per pole	


Standard current ratings and typical internal resistance values

Current rating (A)	Internal resistance (Ω)					
	F1 fast acting for DC only	F2 fast acting delay for AC + DC	M1 standard for AC + DC	T1 delayed low resistance nur für AC	M3 standard delay for AC + DC	T2 thermal for AC + DC
0.1	162	162	92	81	42	77
0.2	39.3	39.3	26.1	24.2	11.7	23
0.3	17.5	17.5	11.6	10.4	5.6	10.2
0.4	9.2	9.2	6,6	6.0	2.9	5.7
0.5	6.8	6.8	4,1	3.9	1.75	3,7
0.6	4.2	4.2	3	2.7	1.42	2.6
0.8	2.8	2.8	1.65	1.53	0.75	1.39
1	1.6	1.6	1,10	0.98	0.5	0.9
1.5	0.78	0.78	0.47	0.42	0.22	0.36
2	0.42	0.42	0.28	0.24	0.136	0.19
2.5	0.26	0,26	0.183	0.17	0.083	0.141
3	0.18	0.18	0.124	0.12	0.057	0.091
4	0.12	0.12	0.077	0.073	0.041	0.051
5	0.092	0.092	0.063	0.055	0.032	0.040
6	0.054	0.054	0.045	0.039	0.021	0.027
8	0.025	0.025	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
10	0.022	0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
12	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
16	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
20	-	-	≤ 0.02	≤ 0.02	-	≤ 0.02
25	-	-	≤ 0.02	≤ 0.02	-	≤ 0.02
32	-	-	≤ 0.02	≤ 0.02	-	≤ 0.02

Dimensions

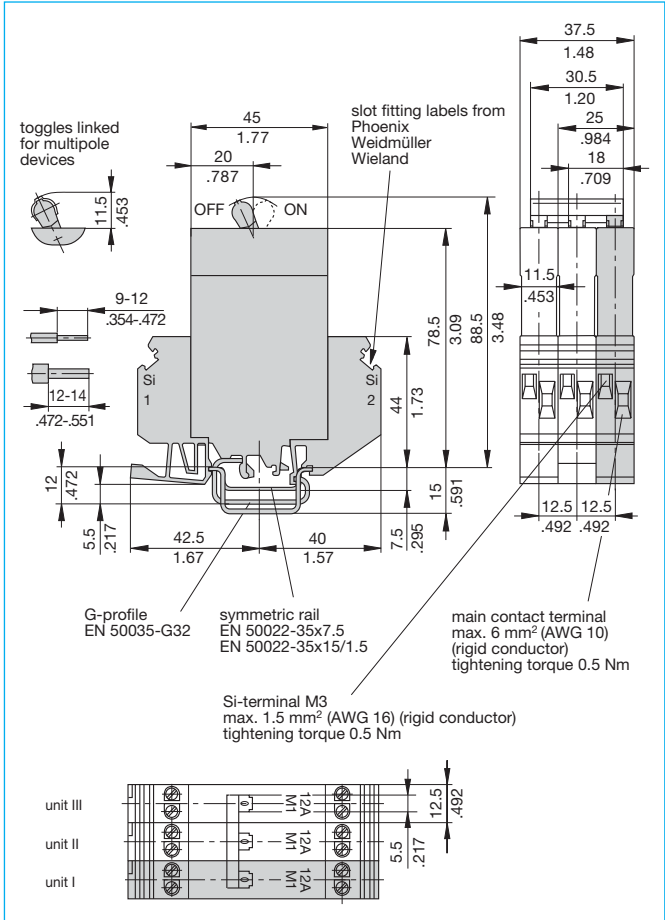


Installation drawing

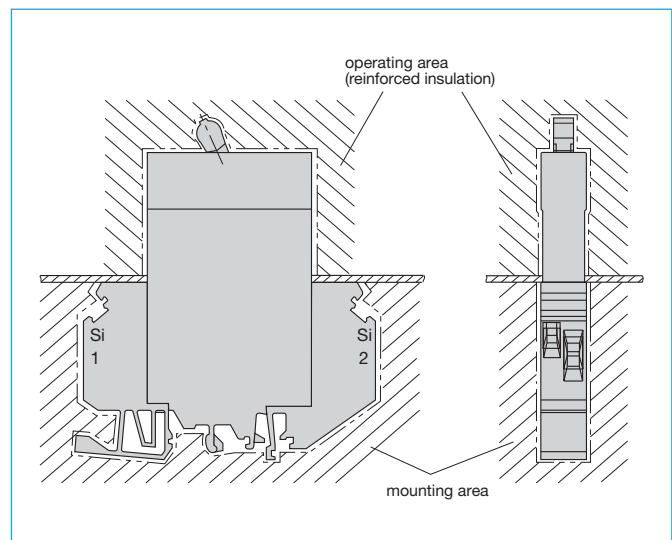


This is a metric design and millimeter dimensions take precedence (mm/inch)

Internal connection diagrams


...-H131-...

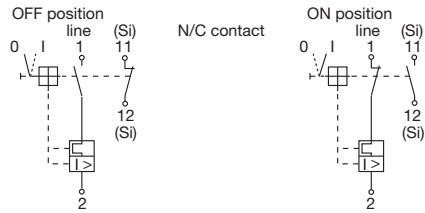

...-H121-...

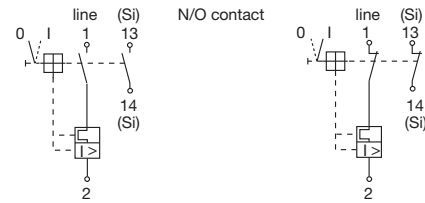


Shock directions

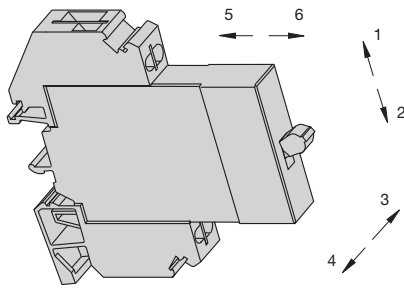

Typical time/current characteristics


-F1 0.1...16 A

DC only

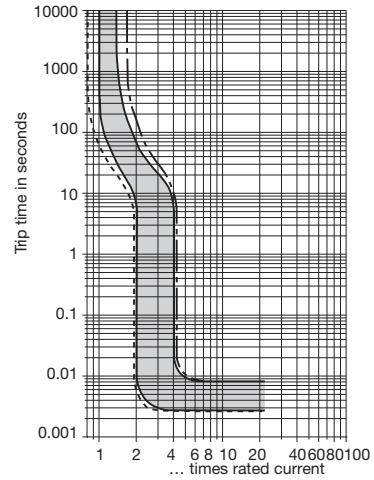


-F2 0.1...7.5 A

AC/ DC¹⁾

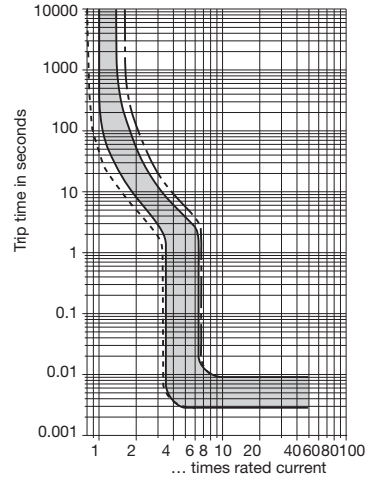

-F2 8...16 A

AC/ DC¹⁾

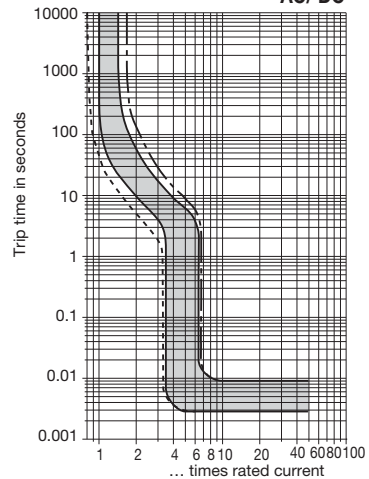

--- +60 °C +140 °F ——— +23 °C +73.4 °F - - - -30 °C -22 °F

¹⁾ Magnetic tripping currents are increased by 30% on DC supplies.









Typical time/current characteristics

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section Technical information.

Ambient temperature °F	-22	-4	+14	+32	+73.4	+86	+104	+122	+140
°C	-30	-20	-10	0	+23	+30	+40	+50	+60
Derating factor	0.76	0.79	0.83	0.88	1	1.04	1.11	1.19	1.29

Multi pole devices: all poles symmetrically loaded. With single pole overload, thermal tripping will be at max. $1.7 \times I_N$ with curves F1, F2, M1 and T2, and at max. $2.2 \times I_N$ with curve M3.

¹⁾ Magnetic tripping currents are increased by 30% on DC supplies.

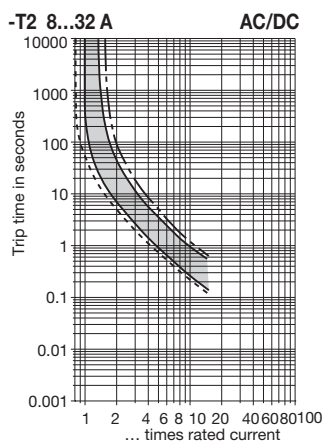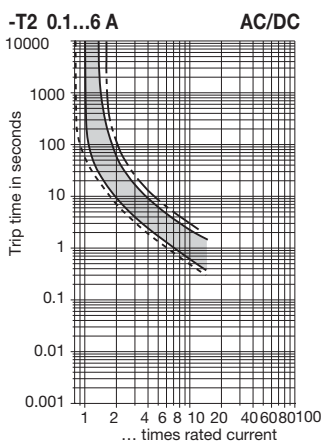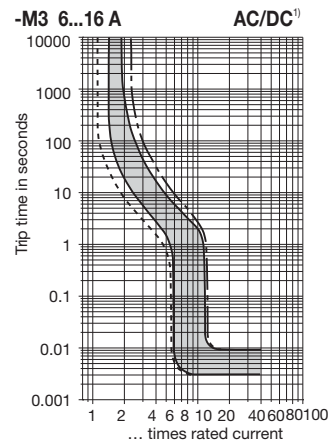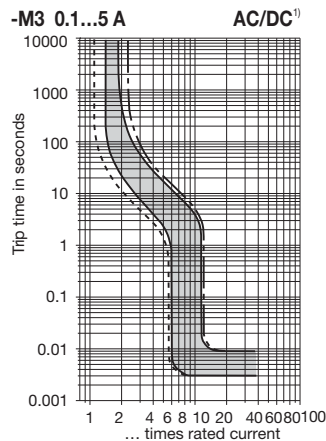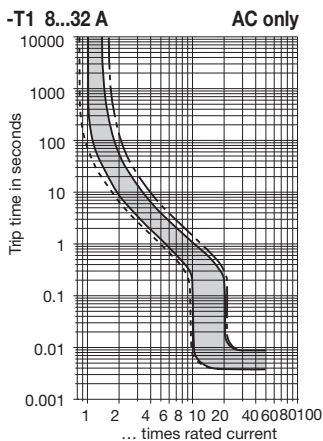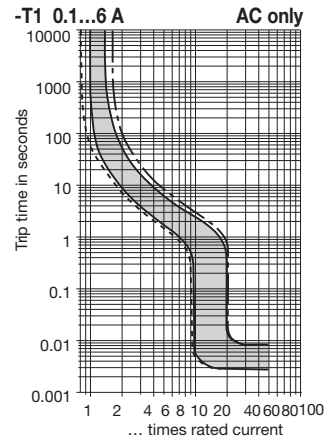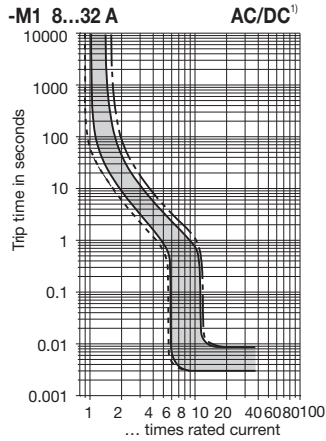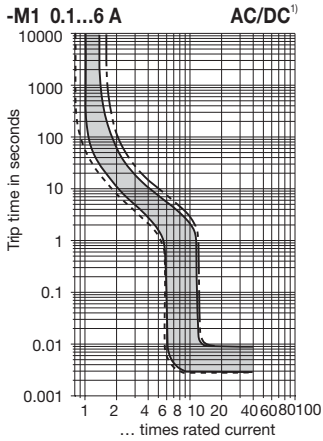


--- +60 °C +140 °F ——— +23 °C +73.4 °F - - - - -30 °C -22 °F

Accessories

Connector bus links -K10



X210 589 01/ 2.5 mm², (AWG 14) (black) up to 20 A max. load
X210 589 02/ 1.5 mm², (AWG 16) (brown) up to 13 A max. load



Busbar 1-pole, 90° X 222 540 01

The one metre long busbars can be cut to suitable lengths. Plug-on caps can be fitted on the ends to provide brush contact protection.



I_{max} - busbar 100 A (40 °C)

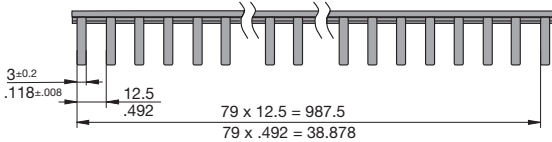

**Plug-on cap, 1-pole
Y 307 851 01**

Busbar 1-pole Y 308 498 01



I_{max} - busbar 100 A (40 °C)

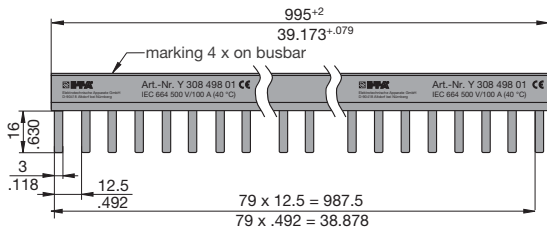

**Plug-on cap, 1-pole
Y 307 851 01**

Busbar 2-pole Y 308 499 01



I_{max} - busbar 100 A (40 °C)

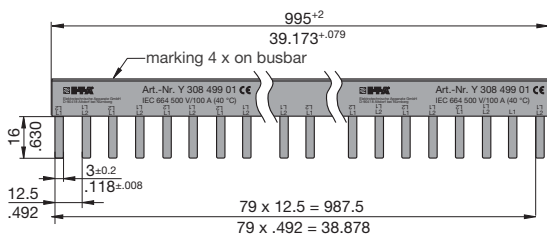

**Plug-on cap, busbar 2/3-pole
Y 308 506 01**

Busbar 3-pole Y 308 500 01

I_{max} - busbar 100 A (40 °C)

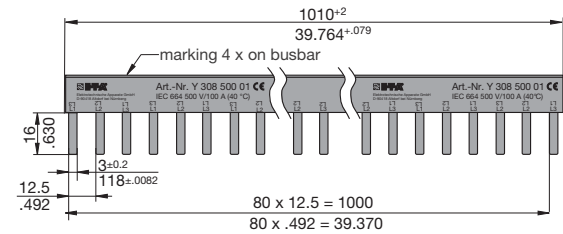



**Plug-on cap, busbar 2/3-pole
Y 308 506 01**

Supply terminal Y 308 503 01

I_{max} 63 A with 1-pole busbar,

50 A with multipole busbar

Max. tightening torque of terminal screw 2 Nm
 Max. cable cross section: 25 mm² / single strand
 16 mm² / multi-strand
 with wire end ferrule

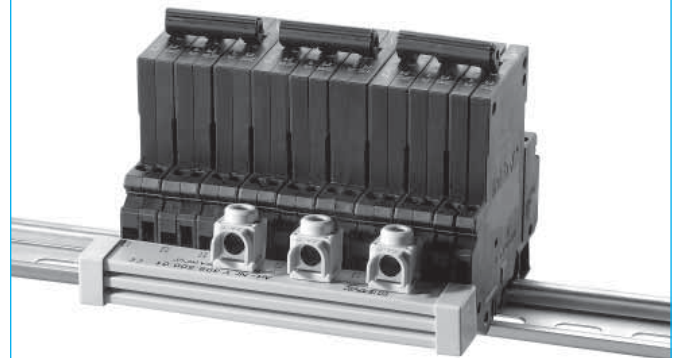

Caution:

When using multipole busbars please leave at least one pole's width between two adjacent line entry terminals.

This is a metric design and millimeter dimensions take precedence ($\frac{mm}{inch}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.